


WR series



WR 218S DXW

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 07/11/2023

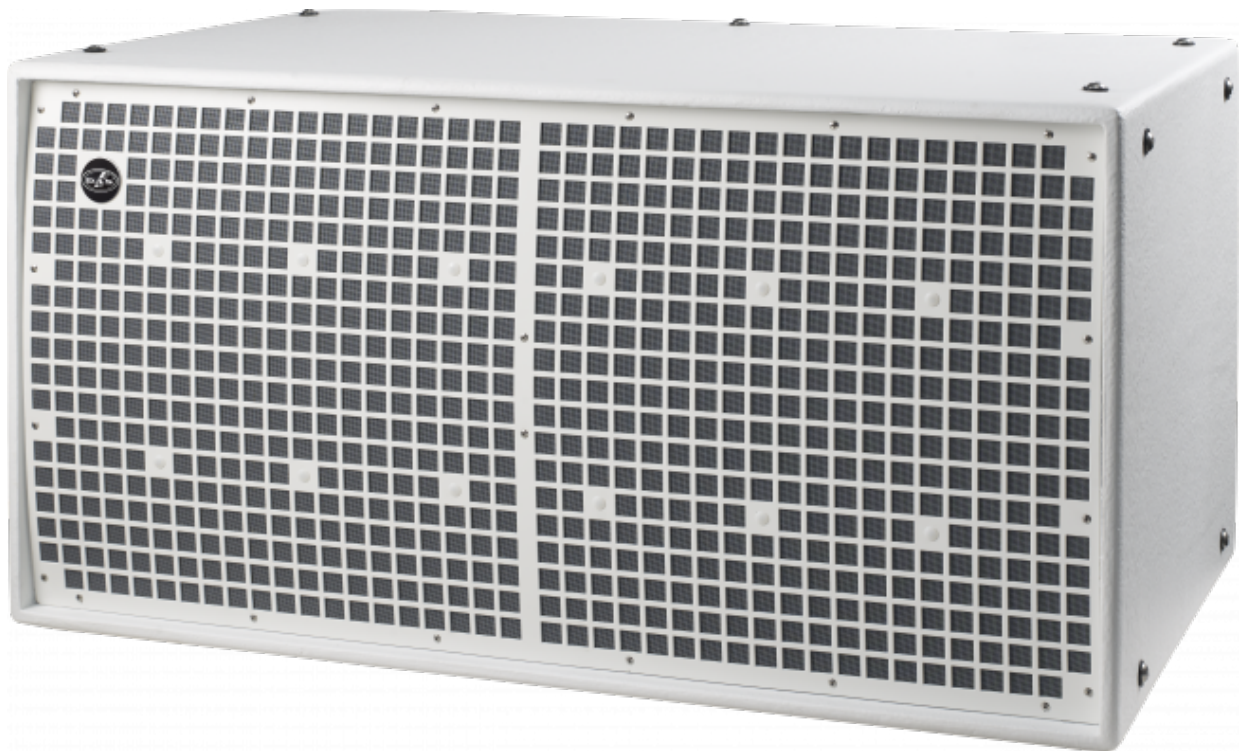

SOUND WITH SOUL

KEY FEATURES

- Weather resistant subwoofer system
- Fiberglass exterior finish
- 4000 W program power handling
- 2 x 18LX low frequency loudspeakers
- For use in biamplified systems
- Stainless steel rigging hardware

APPLICATIONS

- Professional installation systems
- Houses of worship
- Auditoriums/Theaters
- Theme parks
- Outdoor Applications

DESCRIPTION

The WR-218S-DXW is an externally powered, high-performance subwoofer system designed to provide outstanding performance in terms of output power, bandwidth extension and distortion. The WR-218S-DXW incorporates two 18LX long excursion cone transducer.

Designed for the outdoor installation market, the WR-218S models are available in two finishes. The CX (covered exposure) finish for applications where cabinets are covered or protected, and DX (direct exposure) finish where cabinets are unprotected and directly exposed to the environment. The CX versions are protected with a thick ISO-flex polyurea coating. The DX versions augment the protection rating by employing a fiberglass exterior. Stainless steel fittings and mounting hardware are offered on both versions.

WR 218S DXW

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 07/11/2023



SOUND WITH SOUL

SPECIFICATIONS

Performance

Frequency Range (-10 dB)	29 Hz – 160 Hz
Nominal Impedance	4 ohms
RMS Power Handling	2000 W
Peak Power Handling	8000 W
On-axis Sensitivity 1W/1 m	99 dB SPL
Maximum Peak SPL at 1 m	139 dB
Recommended Amplifier	DX-100-230 DX-100-115
Recommended Processor	DSP-2040

Connectors

Audio Input Connector	Covered Barrier Strip Terminals
Audio Output Connector	Covered Barrier Strip Terminals

Enclosure

Enclosure Construction	Birch Plywood
Enclosure Geometry	Rectangular
Rigging	M10 Rigging Points
Finish	Fiberglass
Color	White
IP Rating	IP54
Depth	675 mm (26,6 in)
Dimensions (H x W x D)	550 x 1.065 x 675 mm 21,7 x 41,9 x 26,6 in

WR 218S DXW

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 07/11/2023



SOUND WITH SOUL

Net Weight 70,0 kg (154,3 lb)

Components


LF Driver 18LX

Shipping

Carton Dimensions (H x W x D)
595 x 1.145 x 722 mm
23,4 x 45,0 x 28,4 in

Shipping Weight 80,0 kg (176,0 lb)

DIMENSIONS

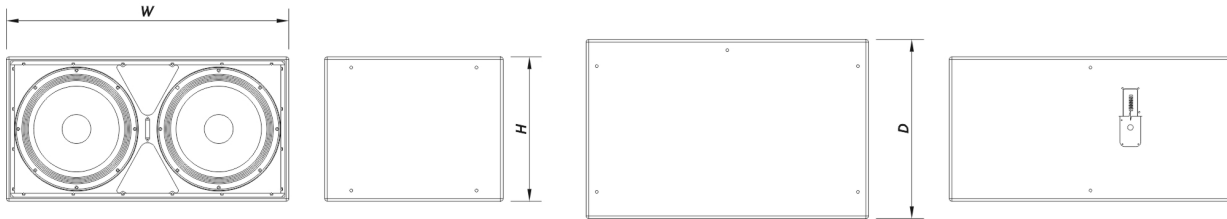

ORDERING INFORMATION

Model	Description	P/N
System		
WR-218S-DXW		10428250
Replacement Parts		
18LX	Cone Transducer	10214270
GM-18LX	Recone Kit	20208310

WR 218S DXW

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 07/11/2023



Accessories

ANL-2

Rigging Accessories

10101020

WR 218S DXW

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 07/11/2023



SOUND WITH SOUL